


E 15/2 U0/V5 MT green

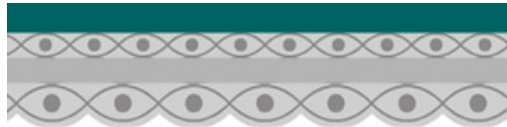

Sketch of cross-section (not actual size)

Applications

- Wedge belt
- Profile belt
- Vanderlande SDI Conveyor/ DistriSorter

Properties/Advantages

- Low noise facric on belt underside
- High effective pull at 1% elongation (k1% relaxed)
- Low noise on Vanderlande SDI systems (MT pattern on PVC belts)

Basic technical data

Top face	PVC
Underside	urethane impregnated
Article number	906728
d _{min} (mm)	90
Total thickness (mm)	2.5
k _{1%} relaxed (N/mm width)	6
Weight (kg/m ²)	2.9
Operating temperature permitted	-10 to +70 °C

Product Quick Info TR-906728-2 · 03/12
FMS · Nachdruck, Vervielfältigung – auch
auszugsweise – nur mit unserer Genehmigung.
Änderungen vorbehalten.

Forbo Siegling GmbH
Lilienthalstraße 6/8, D-30179 Hannover
Telefon +49 511 67 04 0, Fax +49 511 67 04 305
www.forbo-siegling.com, siegling@forbo.com